

12AL026 12ALZ026

AMARON QUANTA™

The industrial segment SMF-VRLA (Valve Regulated Lead Acid) battery for UPS applications is built to perform.

In short, the lifeline to your UPS applications





AMARON QUANTA™ is a product of fail- safe, fool-proof battery technology, produced and tested in our premier manufacturing facility. Built to the highest technical competence in its class, the QUANTA is an example of Amara Raja's commitment to bringing the best of technology to your table

It features several firsts for the battery industry like the unique Radgrid™




Specification

Nominal Voltage	12V	
Rated Capacity	26Ah / C ₂₀ Hr / 1.75VPC / 27°C	
Dimensions (±2mm)	Length	167 mm (6.57 in.)
	Width	126 mm (4.96 in.)
	Total Height	175 mm (6.89 in.)
Weight (±5%)	8.4 Kg (18.52 lbs)	
Terminal Type	M5 x 20 mm Bolted	
Capacity @ 27°C	24.20 Ah	(10hr, 2.42 A, 10.5 V/battery)
	22.30 Ah	(5hr, 4.46 A, 10.2 V/battery)
	16.88 Ah	(1hr, 16.88 A, 9.6 V/battery)
	40°C (104°F)	110%
Capacity affected (Temperature at C20 hr rate)	27°C (80.6°F)	100%
	0°C (32°F)	80%
	-15°C (5°F)	60%
Case Material	Standard	PPCP (12AL026)
	FR Version	UL 94-V0 (12ALZ026)
Internal Resistance (IR)	Approx. 9.8 mΩ for a fully charged battery (27°C)	
Short Circuit Current (As per IEC)	1278 A	
Operating Temp. range	-20°C to +60°C (50 to 60°C for shorter duration)	
Nominal Operating Temp. range	27°C ± 3°C	
Standby use (27°C)	Charging Voltage	13.5 V/battery
	Charging Current	Max. 25% of rated capacity
	Temp. Compensation	± 18mV/battery/°C
	Charging Voltage	13.8 V/battery
Cyclic use (27°C)	Charging Current	Max. 25% of rated capacity
	Temp. Compensation	± 30mV/battery/°C
	Self-Discharge	< 4% per month at 27°C



TERMINAL LAYOUT



All dimensions are in mm

Constant Power Discharge Rating (Watts Per Battery) @ 27°C *

ECV/ Time	10min	15min	20min	30 min	60min	2hrs	3hrs	5hrs	8hrs	10hrs	20hrs
1.60	716	557	456	340	211	120	82.0	56.0	36.0	31.0	15.0
1.65	712	548	448	330	207	119	81.0	55.0	35.5	30.5	14.5
1.70	707	538	440	320	202	118	80.0	54.0	35.0	30.0	14.0
1.75	673	518	424	311	198	117	79.5	53.5	34.5	29.5	13.5
1.80	638	498	408	302	193	116	79.0	53.0	34.0	29.0	13.0

Constant Current Discharge Rating (Amperes) @ 27°C *

ECV/ Time	10min	15min	20min	30min	60min	2 hrs	3 hrs	5 hrs	8hrs	10 hrs	20 hrs
1.60	58.72	46.93	37.25	28.26	16.88	10.24	7.00	4.82	2.99	2.53	1.39
1.65	56.93	44.92	35.89	27.13	16.67	9.83	6.79	4.64	2.92	2.50	1.36
1.70	55.14	42.90	34.53	26.00	16.46	9.41	6.58	4.46	2.86	2.47	1.32
1.75	53.06	41.94	34.21	25.74	16.25	9.29	6.57	4.44	2.84	2.42	1.30
1.80	52.00	41.27	33.33	25.49	15.55	9.22	6.53	4.41	2.83	2.41	1.29

Note:

- The above data are average values per battery and can be obtained within five charge/discharge cycle
- A tolerance of ±5% is applicable for the above constant power discharge and constant current discharge values.
- Recommended to follow IEEE -485 Standard for Battery sizing (In terms of Aging Margin, Design Margin) for Optimal Performance & Life.
- Considerable Voltage drop across cables, if any shall be considering during battery sizing.

**Design improvement is a continuous process of Amara Raja. As a result, specifications are subject to change without prior notice





QUANTA™
— WHEN ALL
ELSE FAILS

CAUTION

- ⚡ Avoid short circuit
- ⚡ Don't charge in a sealed container



THE LONG LIFE UPS BATTERY

Performance

A clutch of design features ensures that AMARON QUANTA™ batteries perform predictably and reliably every time

- ✓ Proven AGM technology that ensures maintenance free characteristics
- ✓ A unique heavy duty corrosion-resistant alloy for positive grids to increase cyclic life in tropical
- ✓ Radgrid™ profile provides lower internal resistance and superior high-discharge performance
- ✓ Instacharge™ a patented paste recipe for excellent charge acceptance
- ✓ Low self-discharge rates for extended storage periods
- ✓ Design Float life of upto 10 years
- ✓ Clean and Sleek looks


Compliance

- ✓ JIS C 8702 Certified
- ✓ UL (UL-1989) & CE Certified
- ✓ Complies to IEC61056 & EUROBAT
- ✓ Complies to IS 16220
- ✓ Manufactured in ISO 9001, ISO 14001, ISO45001:2018 certified facilities


Applications

- ✓ Data Centers
- ✓ Banks & Financial Markets
- ✓ Network Operations Centers
- ✓ Industrial Process Control Facilities
- ✓ Safety, Surveillance & Security Systems
- ✓ Semiconductor Manufacturing
- ✓ Power Generation Plants
- ✓ Hospital & Testing laboratories


Discharge Characteristics

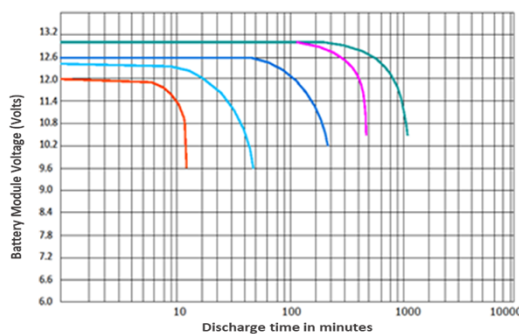


Temperature Effect on Capacity

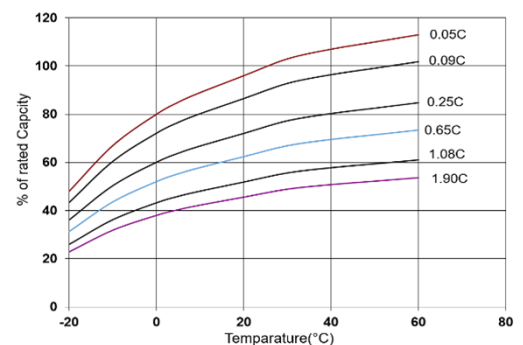

Shelf Life Characteristics

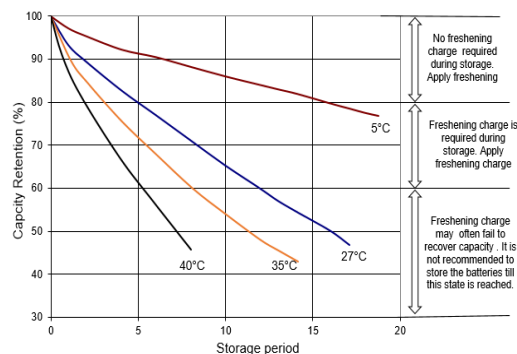

Float Service Life vs. Temperature

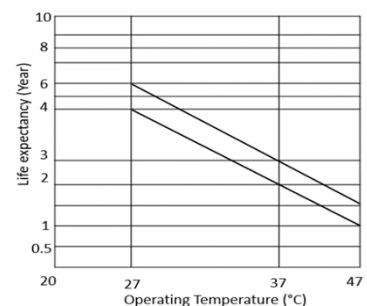

AMARA RAJA ENERGY & MOBILITY LIMITED

(Formerly Known as Amara Raja Batteries Limited)

- **Corporate Operations Office:**
Terminal A, 1-18/1/AMR/NR, Nanakramguda, Gachibowli, Hyderabad-500032, India, E-Mail: mktg@amararaja.com
www.amararajaeandm.com
- **Registered Office & Manufacturing Facility-1:**
UNIT-I, Karakambadi - 517520, Tirupati, Andhra Pradesh, India, TEL: +91-877-2265000, FAX: +91-877-2285600
- **Manufacturing Facility-2**
UNIT-II, Nunegundlapalle, Bangarupalyam, Chittoor - 517416, Andhra Pradesh, India



AMARA RAJA
Gotta be a better way

ARE&M/IAE/AQ/26Ah; Oct'2023, Rev-01

**Design improvement is a continuous process of Amara Raja. As a result, specifications are subject to change without prior notice